

SAN NOPCO LIMITED

PRODUCT CATALOG

NOPCO SAN NOPCO

www.sannopco.co.jp

SAN NOPCO LIMITED

Tokyo Office

24F, Hibiya Fort Tower, 1-1-1,
Nishi-shimbashi, Minato-ku, Tokyo,
105-0003, Japan
Phone : +81-3-3500-3501 (Main)
+81-3-3500-3502 (Delivery)
Fax : +81-3-3500-3503

Osaka Office

11-1, Ikkyo Nomoto-cho,
Higashiyama-ku, Kyoto 605-0995,
Japan
Phone : +81-75-541-4380
Fax : +81-75-541-4381

Nagoya Research Laboratory & Factory

31-1, Shinpomachi, Tokai-city,
Aichi 476-0005, Japan
Phone : +81-52-604-0196
Fax : +81-52-601-7038

Research & Development (Kyoto)

11-1, Ikkyo Nomoto-cho,
Higashiyama-ku, Kyoto, 605-0995,
Japan
Phone : +81-75-541-6340
Fax : +81-75-541-9602

mail : sannopco@sanyo-chemical.group

San Nopco is advancing globally


Coating chemicals



Architectural paint



Ink

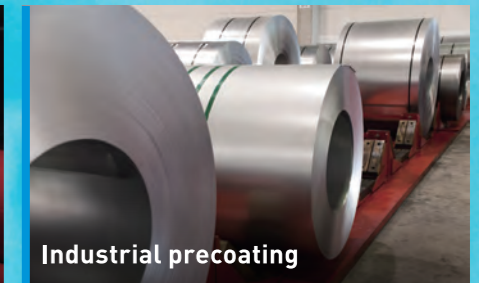

Industrial precoating



Adhesives



Coated Paper



Calcium carbonate slurry


Process chemicals




Resin, gum manufacturing process



Emulsion, latex manufacturing process

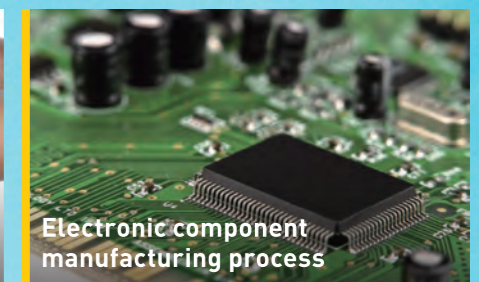

Electronic component manufacturing process

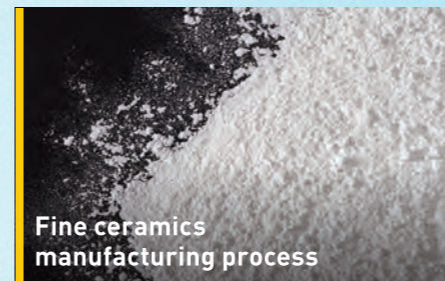

Fine ceramics manufacturing process



Inorganic Pigment, Organic Pigment



Siding board manufacturing process




Cement



Metal working process



Kraft pulp manufacturing process

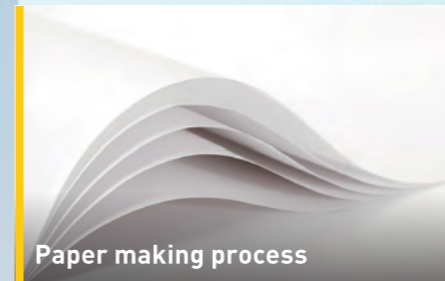

Paper making process



Drainage water



Coating Chemicals (Aqueous)

Defoamer

Refer the classification of Defoamer at p.19

TYPE	Product Name	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
Hydrophobic silica type	NOPTAM 777-F	Shows excellent dispersibility and less cratering. General anti-foaming agent.	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 17kg can Net 180kg drum
	NOPTAM 8034-F	General anti-foaming agent.	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>		Net 16kg can Net 180kg drum
	NOPTAM 8034-LF	Anti-foaming agent with good water dispersibility	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 16kg can Net 180kg drum
	SN-5598	Shows excellent dispersibility and less cratering. Prevents micro foam.	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	Net 15kg can Net 160kg drum
	SN-DEFOAMER 154	Excellent continuous anti-foaming effect. Versatile for flat paint.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>			Net 16kg can Net 180kg drum
	SN-DEFOAMER 154S	Effective for semi-gloss paint and flat paint. Shows excellent water dispersibility and less cratering.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		Net 15kg can Net 170kg drum
	SN-DEFOAMER 318	Effective for flat paint. Shows excellent workability because of its low viscosity.	<input type="checkbox"/>			<input type="checkbox"/>				Net 15kg can Net 160kg drum
	SN-DEFOAMER 319	Effective for semi-gloss paint and flat paint. Shows excellent rapid foam breaking and durability.	<input type="checkbox"/>			<input type="checkbox"/>				Net 15kg can Net 160kg drum
	SN-DEFOAMER 321C	Effective for flat paint and high PVC coatings. Shows excellent continuous anti-foaming effect and rapid foam breaking.	<input type="checkbox"/>			<input type="checkbox"/>				Net 15kg can Net 160kg drum
	SN-DEFOAMER 1329	Effective for polyvinyl acetate type paint.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>			Net 15kg can Net 180kg drum
SN-DEFOAMER 1341	Effective for architectural paint, flat paint with less coagulation and cratering.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>			Net 15kg can	
Metallic soap type	SN-DEFOAMER 1330	Shows excellent foam breaking. Versatile for emulsion paint.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>			Net 16kg can Net 180kg drum
	SN-DEFOAMER 1390	Silicone free and less cratering. Versatile for emulsion paint.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>			Net 16kg can Net 180kg drum



TYPE	Product Name	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
Wax type	SN-DEFOAMER 477-NS	Silicone free and less cratering. Versatile for latex, resin emulsion, water-based paint.	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 15kg can Net 170kg drum
	SN-DEFOAMER 477T	Shows excellent water dispersibility. Versatile for latex, emulsion and water-based paint.	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>		Net 15kg can Net 170kg drum
	SN-DEFOAMER 479	Shows excellent water dispersibility, less cratering, less oil spot.	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 15kg can Net 170kg drum
	SN-DEFOAMER 1340	Silicone free and less cratering. Versatile for emulsion paint. Show long-lasting anti-foaming ability.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		Net 15kg can Net 160kg drum
	SN-DEFOAMER 1360	Silicone free and less cratering. Versatile for flat, semi-gloss paint.	<input type="checkbox"/>			<input type="checkbox"/>				Net 15kg can Net 170kg drum
	SN-DEFOAMER 5100	Shows excellent water dispersibility and less cratering. Versatile for water-based ink, emulsion paint.	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>			Net 15kg can Net 170kg drum
Modified Silicone type	SN-DEFOAMER 391	Effective for gloss paint. Shows excellent anti-foaming durability and soil releasing performance.		<input type="checkbox"/>			<input type="checkbox"/>			Net 25kg can
	SN-DEFOAMER 398	Effective for gloss paint. Shows excellent soil release performance.		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			Net 18kg can
	SN-DEFOAMER 399	Effective for gloss paint. Shows excellent soil release performance and less gloss decreasing.		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			Net 18kg can Net 180kg drum
	SN-DEFOAMER 1310	Effective for gloss paint. Shows excellent soil release performance.		<input type="checkbox"/>		<input type="checkbox"/>				Net 18kg can
	SN-DEFOAMER 1311	Effective for gloss paint. Shows excellent soil release performance and durability of gloss.		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			Net 18kg can
	SN-DEFOAMER 1315	Effective for gloss paint. Versatile for zero-VOC paint, because of mineral oil free.		<input type="checkbox"/>		<input type="checkbox"/>				Net 18kg can
SN-DEFOAMER 1316	Effective for gloss paint, architectural material paint, inks. Shows excellent water dispersibility.		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>			Net 18kg can	



TYPE	Product Name	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
Silicone type	SN-DEFOAMER 325	Effective for elastic paint in roller process, and spraying process.			○		○			Net 16kg can
	SN-DEFOAMER 327	Effective elastic paint, soil releasing paint. Shows less gloss decreasing.			○					Net 18kg can
	SN-DEFOAMER 5016	Effective for elastic paint.			○	○		○		Net 16kg can Net 180kg drum
Polyether compound type	SN-DEFOAMER 1355	Effective for gloss paint. Shows less gloss decreasing and less cratering.	○	○				○		Net 17kg can Net 180kg drum
	SN-DEFOAMER 1356	Shows excellent anti-foaming in millbase process. Effective for gloss paint.	○	○				○		Net 16kg can
Polyether type	SN-DEFOAMER PC	Shows less cratering.	○				○	○		Net 18kg can Net 200kg drum
	SN-DEFOAMER 170	Shows excellent workability, because of its low viscosity.	○				○			Net 17kg can Net 180kg drum
	SN-DEFOAMER 180	Shows extremely less cratering.	○				○	○	○	Net 18kg can Net 210kg drum
	SN-DEFOAMER 184	Shows less cratering and better deformability than SN-DEFOAMER 180.	○				○	○	○	Net 18kg can Net 200kg drum
	SN-DEFOAMER 247	Shows less cratering and excellent durability of anti-foaming.	○				○			Net 18kg can
	SN-DEFOAMER 265	Foam breaking/anti-foaming agent for starch type clear coating color.					○		○	Net 18kg can Net 200kg drum
	SN-DEFOAMER 375	Shows excellent water dispersibility and less cratering.					○		○	Net 18kg can
	SN-DEFOAMER 444	Shows less cratering.					○	○		Net 17kg can Net 180kg drum
	SN-DEFOAMER 466	Shows less cratering.					○			Net 18kg can
	SN-DEFOAMER 470	Shows excellent water dispersibility and less cratering.	○				○	○	○	Net 18kg can Net 190kg drum
SN-DEFOAMER 485	Shows excellent performance in wide range of temperature.	○				○	○		Net 18kg can Net 200kg drum	



TYPE	Product Name	Description & Application	Application							Packaging	
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER		
			FLAT	GLOSS	ELASTIC						
Emulsion type	NOPTAM 7001	Polyether emulsion type foam breaking/anti-foaming agent for coating color. Excellent water dispersibility and less cratering.								○	Net 16kg can Net 180kg drum Net 1000kg container
	SN-DEFOAMER 381	Effective for gloss paint. Shows less gloss decreasing and less cratering.		○			○	○			Net 18kg can
	SN-DEFOAMER 388N	Silicone emulsion type foam breaking/anti-foaming agent. Mineral oil free.	○			○	○	○			Net 18kg can
	SN-DEFOAMER 522	Shows excellent water dispersibility and less cratering.	○					○			Net 16kg can Net 180kg drum
SN-DEFOAMER 2000	Effective for semi-gloss paint and flat paint. Shows less cratering.	○						○	○	Net 16kg can Net 180kg drum	

Dispersant

Product Name	Composition, Active Content	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
LOMAR D	Formaldehyde-naphthalenesulfonic condensate sodium salt Anionic 81% powder	Dispersant for inorganic pigments as calcium carbonate, clay, cement, carbon black, etc.								Net 24.9kg bag
LOMAR PWA-40K	Formaldehyde-naphthalenesulfonic condensate ammonium salt Anionic 40%	Effective for dispersing ceramics, pigment, emulsion particle. Versatile for emulsifier of emulsion polymerization. Less residue after sintering.								Net 20kg can
LOMAR PWH	Formaldehyde-naphthalenesulfonic condensate sodium salt Anionic 88% powder	Versatile dispersant for pigments, inorganic pigment and emulsifier of emulsion polymerization.								Net 22.6kg bag
NOPCALL 5200K	Ammonium salts of polycarboxylic acid Anionic 30%	Dispersant with water resistance. Shows good color acceptance of color pigments.	○	○	○		○			Net 19kg can Net 200kg drum
NOPCOSPERSE 5600	Ammonium salts of polycarboxylic acid Anionic 40%	Versatile for dispersing fine particle type ceramics.					○			Net 20kg can
NOPCALL D-4220	Quaternary cation polymer Cationic 52%	Cation polymer type dispersant. Versatile for inorganic pigments as calcium carbonate, clay, etc.	○		○	○			○	Net 18kg can
SN-DISPERSANT 5020	Ammonium salts of polycarboxylic acid Anionic 40%	Polycarboxylic type general dispersant. Versatile for emulsion paint. Shows excellent water-repellent.	○	○	○					Net 20kg can Net 230kg drum
SN-DISPERSANT 5027	Ammonium salts of polycarboxylic acid Anionic 20%	Dispersant with water resistance. Shows good color acceptance of color pigments.	○	○	○		○			Net 18kg can Net 220kg drum
SN-DISPERSANT 5029	Ammonium salts of polycarboxylic acid Anionic 25%	Dispersant with excellent water resistance. Shows excellent dispersibility.	○	○	○					Net 18kg can
SN-DISPERSANT 5034	Sodium salts of polycarboxylic acid Anionic 40%	Shows excellent dispersibility for fine inorganic pigments.	○	○	○					Net 20kg can Net 250kg drum
SN-DISPERSANT 5468	Ammonium salts of polycarboxylic acid Anionic 40%	Polycarboxylic acid type general dispersant. Versatile for emulsion paint. Shows excellent water-repellent.	○	○	○		○			Net 20kg can Net 220kg drum
SN-DISPERSANT 6100	Amine salts of polycarboxylic acid Anionic 70%	Dispersant for organic and inorganic pigments. Shows excellent color acceptance and water resistance.	○	○	○		○			Net 18kg can
SN-DISPERSANT 6150	Amine salt of polymeric carboxylic acid Anionic 73%	Versatile for organic pigment(magenta, yellow). Excellent color development, color acceptance of paint.	○	○	○					Net 18kg can
SN-PW-43	Formaldehyde-naphthalenesulfonic condensate sodium salt Anionic 41%	Effective for dispersing ceramics, pigment, emulsion particle. Versatile for emulsifier of emulsion polymerization.							○	Net 20kg can

Wetting agent, Emulsifier

Product Name	Ionicity, Active Content	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
NOPCALL W-2990	Nonionic 100%	Modified silicone type wetting agent. Shows excellent lowering ability of static and dynamic surface tension.	○	○	○	○	○			Net 18kg can Net 190kg drum
SN-WET L	Nonionic 100%	Fatty acid ester type wetting agent. Effective for improving leveling performance.	○	○	○	○	○			Net 18kg can
SN-WET OT-70	Anionic 70%	Shows excellent penetrating performance and wetting ability. Improves wettability to pigments and base.					○	○	○	Net 200kg drum
SN-WET 126	Nonionic 100%	Modified silicone type wetting agent. Shows excellent lower surface tension ability.	○	○	○	○	○			Net 18kg can
SN-WET 970	Anionic 50%	Shows excellent penetrating performance and improving color acceptance.	○	○	○	○	○			Net 18kg can
SN-WET 980	Nonionic 100%	Low foaming polyether type wetting agent. Shows excellent lowering ability of dynamic surface tension. Improves curtain flow performance and spray performance.	○	○	○	○	○			Net 18kg can
SN-WET 984	Nonionic 100%	Low foaming polyether type wetting agent. Shows excellent lowering ability of dynamic surface tension.	○	○	○	○	○			Net 18kg can
SN-WET 990	Nonionic 100%	Low foaming color acceptance improver.	○	○	○	○	○			Net 17kg can
SN-WET 991	Anionic 50%	Shows excellent penetrating performance and improving color acceptance.	○	○	○	○	○			Net 18kg can
SN-WET 996	Nonionic 100%	Low foaming color acceptance improver.	○	○	○	○	○			Net 17kg can Net 190kg drum
SN-WET 999	Nonionic 100%	Special amine type wetting agent. Shows excellent wetting ability and improves color acceptance.	○	○	○	○	○			Net 17kg can

Rheology Modifiers

Product Name	Composition, Active Content	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
NOPALL 717T	Ammonium salt of acrylic polymer Polyether type compound 10%	Pseudoplastic, thixotropic polymer type rheology modifier. Versatile for emulsion paint without pH adjustment. Shows excellent ability of prevention of cracking by drying.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can
SN-THICKENER 613	Modified polyacrylic acid 20%	Gives thixotropic viscosity. Many kinds of surface patterns can be given to elastic paints by combining it with SN-THICKENER 621N. Less effective color acceptance.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	Net 18kg can
SN-THICKENER 617	Modified polyacrylic acid 20%	Gives thixotropic viscosity and improves spray coating performance. Prevent cracking from drying.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can Net 190kg drum
SN-THICKENER 618	Modified polyacrylic acid sodium salt 12%	Thixotropic rheology modifier for emulsion paint and architectural spraying finish material.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	Net 18kg can
SN-THICKENER 621N	Urethane modified polyether type 30%	Newtonian rheology modifier for water-soluble paint and emulsion paint. Improve leveling performance and no-adverse effect to gloss.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can
SN-THICKENER 621TF	Urethane modified polyether type 30%	Tin free type of SN-THICKENER 621N.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can
SN-THICKENER 623N	Urethane modified polyether type 30%	Newtonian high thickening rheology modifier for emulsion paint. Show excellent leveling performance and less adverse effect to color acceptance and low sensitive to temperature.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can Net 200kg drum
SN-THICKENER 625N	Urethane modified polyether type 15%	Newtonian low thickening rheology modifier without high-boiling point solvent. Versatile for zero VOC paint.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can Net 200kg drum
SN-THICKENER 630	Modified polyacrylic type 30%	Pseudoplastic, thixotropic rheology modifier. Versatile for flat paint and gloss paint.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can
SN-THICKENER 640	Modified polyacrylic type 30%	Pseudoplastic, thixotropic rheology modifier. Versatile for flat paint and gloss paint.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can Net 200kg drum
SN-THICKENER 641	Modified polyacrylic type 30%	Pseudoplastic, thixotropic rheology modifier. Versatile for flat paint and gloss paint.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can Net 200kg drum
SN-THICKENER 660T	Urethane modified polyether type 20%	Association type high viscosity, high thixotropic rheology modifier. Shows excellent water resistance.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can
SN-THICKENER 665T	Urethane modified polyether type 10%	Association type high viscosity, high thixotropic rheology modifier. Shows excellent water resistance and excellent toning performance.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					Net 18kg can

Water retention aid / Rheology modifier

Product Name	Composition, Active Content	Description & Application	Application							Packaging	
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER		
			FLAT	GLOSS	ELASTIC						
SN-THICKENER 920	Modified polyacrylic type 30%	Alkaline swellable emulsion. Shows Excellent water retention performance. Prevents from streaking, unevenness of coated weight and migration of binder. Imparts good long term stability of coating color viscosity.								<input type="checkbox"/>	Net 18kg can
SN-THICKENER 929-S	Modified polyacrylic acid sodium salt 12%	Modified polyacrylate aqueous solution. Effective as water retention aid for curtain flow coating, prevents from film breaking at curtain flow process, and prevent the preparation of roll mark.						<input type="checkbox"/>		<input type="checkbox"/>	Net 18kg can Net 200kg drum
VISTOOL 3015	Modified polyacrylic type 30%	Alkaline swellable emulsion. Shows Excellent water retention performance. Prevents from streaking, unevenness of coated weight and migration of binder. Imparts good long term stability of coating color viscosity.								<input type="checkbox"/>	Net 18kg can Net 180kg drum

Lubricant & Release agent, Water repellent agent. Fluorescence brightening improver, Surface sizing agent

Product Name	Composition, Active Content	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
NOPCOCERA LU-6418	Stearic acid 30%	Versatile for releasing agent for press mold of fine ceramics.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 16kg can Net 180kg drum	
NOPCOMUL MS-40	Polyethylene paraffin type 40%	Shows excellent unblocking, lubricant, releasing and water repellent	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 17kg can	
OPTIACT I-10	Nonionic surfactant 100%	Shows excellent fluorescence brightening performance compare with polyvinyl alcohol, carboxy methyl cellulose without increasing the viscosity of coating color. Direct addition is available without dissolving process as polyvinyl alcohol.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 18kg can	
SN-COTE 287	Oxydized polyethylene type 40%	Shows excellent releasing performance and improving gloss. Versatile for cast coated paper.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 17kg can Net 190kg drum	
SN-DULLACT 1200W	Polyolefine wax type 40%	Delustering agent for water-based paint. Shows excellent water-repellent.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 18kg can	

Flash rust inhibitor for Water based Paints

Product Name	Composition, Active Content	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
NOPCOHEX 2020	Organic carboxylate 70%	Shows excellent preventive properties for flash rust. Nitrite free and less negative effect of water resistance.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 18kg can Net 200kg drum	

Coating Chemicals (Non aqueous)

Defoamer

Refer the classification of Defoamer at p.19

Product Name	Description & Application	Application							Packaging
		Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
		FLAT	GLOSS	ELASTIC					
DAPPO SN -348	Silicone free. Versatile for acrylic, urethane paint.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 15kg can
DAPPO SN -351	Alkyd type. Versatile for air drying coating. Shows excellent anti-foaming performance to high viscosity paint and excellent leveling performance.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 15kg can
DAPPO SN -354	Silicone free type. Versatile for air drying coating.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 15kg can
DAPPO SN -357-LS	Versatile for solvent type paint, especially for turpentine soluble acrylic paint.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 14kg can
DAPPO SN -374	Versatile for solvent distillation process.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 1kg can

Dispersant

Product Name	Composition, Active Content	Description & Application	Application							Packaging
			Paints			INK	INDUSTRIAL	ADHESIVE	COATED PAPER	
			FLAT	GLOSS	ELASTIC					
NOPCOSPERSE 092	Cationic surfactant 100%	Shows excellent dispersibility for fine powder in diesel oil, for pigments to organic solvent.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 18kg can	
SN-DISPERSANT 9228	Ester type nonionic surfactant 100%	Versatile for ferrite, fine ceramics in organic solvent. Useful as both wetting agent and dispersant.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 18kg can	
SN-SPERSE 70	Nonionic surfactant 100%	Dispersant for grinding process of pigments. Versatile for magnetic ink, magnetism tape.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 17kg can Net 200kg drum	
SN-SPERSE 2190	Polycarboxylic acid amine salt 51%	Versatile for various pigment using together bentonite. Prevent flooding.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Net 15kg can	



Process Chemicals

Defoamer for resin, rubber, emulsion, latex making process

Product Name	Description & Application	Packaging
NOPTAM 740A	Anti-foaming agent for polyvinyl alcohol. Less damage to transparency of polyvinyl alcohol solution. Silicone-free	Net 18kg can Net 200kg drum
NOPTAM 777-F	Shows excellent dispersibility and less cratering. General anti-foaming agent.	Net 17kg can Net 180kg drum
NOPTAM 8034-F	General anti-foaming agent.	Net 16kg can Net 180kg drum
SN-DEFOAMER PC	Anti-foaming agent for polyvinyl alcohol. Silicone-free	Net 18kg can Net 200kg drum
SN-DEFOAMER 381	Silicone emulsion type anti-foaming agent. Excellent mechanical stability.	Net 18kg can
SN-DEFOAMER 444	Anti-foaming agent for polyvinyl alcohol. Less damage to transparency of polyvinyl alcohol solution. Silicone-free	Net 17kg can Net 180kg drum
SN-DEFOAMER 470	Anti-foaming agent with good dispersibility and less cratering.	Net 18kg can Net 190kg drum
SN-DEFOAMER 477-NS	Anti-foaming agent for monomer stripping process. Less cratering. Silicone-free.	Net 15kg can Net 170kg drum
SN-DEFOAMER 477T	Anti-foaming agent for monomer stripping process. Less cratering.	Net 15kg can Net 170kg drum
SN-DEFOAMER 479	Anti-foaming agent for monomer stripping process. Stability of dilute solution is excellent.	Net 15kg can Net 170kg drum
SN-DEFOAMER 485	Anti-foaming agent for polyvinyl alcohol.	Net 18kg can Net 200kg drum
SN-DEFOAMER 522	Anti-foaming agent for finished process of latex. Less cratering. Silicone-free	Net 16kg can Net 180kg drum
SN-DEFOAMER 1330	Anti-foaming agent effective for acrylic type emulsion. Good for foam breaking.	Net 16kg can Net 180kg drum
SN-DEFOAMER 1390	Versatile metal soap type anti-foaming agent. Silicone-free	Net 16kg can Net 180kg drum

Emulsifier

Product Name	Description & Application	Packaging
NOPCALL E-9001	Copolymerizable emulsifier. Improve water resistance, foaming property and mechanically stability of emulsion, such as poly-alkylacrylate (or methacrylate).	Net 18kg can Net 190kg drum
SN-WET 970	Low foaming anion type wetting agents. High efficiency of reduction on surface tension. Excellent wettability and penetrating property to emulsion.	Net 18kg can
SN-WET 991	Improve wetting of pigments.	Net 18kg can

Defoamer for electronic component making process

Product Name	Description & Application	Packaging
SN-DEFOAMER PC	Anti-foaming agent with good dispersibility and less cratering.	Net 18kg can Net 200kg drum
SN-DEFOAMER 470	Anti-foaming agent with good dispersibility and less cratering.	Net 18kg can Net 190kg drum

Dispersant and Lubricant for fine ceramics manufacturing process

Product Name	Composition, Active Content	Description & Application	Packaging
LOMAR PWA-40K	Formaldehyde-naphthalenesulfonic condensate sodium salt 40%	Versatile for dispersing ceramics, pigment, emulsion particles. Effective for emulsifier of emulsion polymerization.	Net 20kg can
NOPCOSPERSE 5600	Ammonium salts of polycarboxylic acid 40%	Versatile for dispersing fine particle type fine ceramics.	Net 20kg can
SN-DISPERSANT 5020	Ammonium salts of polycarboxylic acid 40%	Ammonium salt type dispersant. Excellent dispersing performance of ferrite and fine ceramics. Less residue after sintering.	Net 20kg can Net 230kg drum
SN-DISPERSANT 5027	Polycarboxylic acid ammonium salt 20%	Dispersant with excellent water resistance.	Net 18kg can Net 220kg drum
SN-DISPERSANT 5029	Polycarboxylic acid ammonium salt 25%	Excellent water resistance.	Net 18kg can
SN-DISPERSANT 5468	Ammonium salts of polycarboxylic acid 40%	Ammonium salt type dispersant. Excellent dispersing performance of ferrite and fine ceramics. Less residue after sintering.	Net 20kg can
SN-DISPERSANT 6100	Polycarboxylic acid amine salt, polyoxyalkylene glycol monomethyl ether, etc. 70%	Excellent dispersing performance of ferrite and fine ceramics. Less residue after sintering. Good for both hydrophilic particles and hydrophobic particles.	Net 18kg can
SN-DISPERSANT 9228	Ester type nonionic surfactant 100%	Wetting and dispersing agent for ferrite and fine ceramics in organic solvent.	Net 18kg can
SN-SPERSE 2190	Polycarboxylic acid amine salt 51%	Versatile for dispersing various pigments and prevent flooding. More effective with bentonite.	Net 15kg can

Lubricant for fine ceramics manufacturing process

Product Name	Composition, Active Content	Description & Application	Packaging
NOPCOCERA LU-6418	Stearic acid 40%	Versatile for mold release agent for fine ceramics.	Net 16kg can Net 180kg drum
NOPCOMUL MS-40	Polyethylene wax 40%	Effective for preventing for cracking and blocking.	Net 17kg can
NOPCOTE PEM-17	Polyethylene 40%	Anti-blocking agent	Net 18kg can Net 200kg drum

Dispersant for pigment (inorganic, organic)

	Product Name	Composition, Active Content	Description & Application	Packaging
Aqueous	LOMAR D	Formaldehyde-naphthalenesulfonic condensate sodium salt 81% powder	Versatile for dispersing calcium carbonate, clay, cement, carbon black.	Net 24.9kg bag
	LOMAR PWA-40K	Formaldehyde-naphthalenesulfonic condensate ammonium salt 40%	Versatile for dispersing ceramics, pigment, emulsion particles. Also versatile for emulsifier of emulsion polymerization.	Net 20kg can
	LOMAR PWH	Formaldehyde-naphthalenesulfonic condensate sodium salt 88% powder	Versatile for dispersing pigments, inorganic pigments and emulsifier for emulsion polymerization.	Net 22.6kg bag
	NOPCOSPERSE 5600	Polycarboxylic acid sodium salt 40%	Versatile for fine particle type ceramics.	Net 20kg can
	NOPCALL D-4220	Quaternary cation polymer Cationic 52%	Cation polymer type dispersant. Versatile for inorganic pigments as calcium carbonate, clay, etc.	Net 18kg can
	SN-DISPERSANT 5020	Polycarboxylic acid ammonium salt 40%	Excellent dispersing performance of ferrite and fine ceramics. Less residue after sintering.	Net 20kg can Net 230kg drum
	SN-DISPERSANT 5027	Polycarboxylic acid ammonium salt 20%	Dispersant with excellent water resistance.	Net 18kg can Net 220kg drum
	SN-DISPERSANT 5029	Polycarboxylic acid ammonium salt 25%	Dispersant with water resistance.	Net 18kg can
	SN-DISPERSANT 5034	Polycarboxylic acid sodium salt 40%	Excellent dispersing performance for fine inorganic particles. Versatile for precipitated calcium carbonate.	Net 20kg can Net 250kg drum
	SN-DISPERSANT 5040	Polycarboxylic acid sodium salt 40%	Low foaming dispersant. Show excellent color acceptance and viscosity stability.	Net 20kg can Net 250kg drum
	SN-DISPERSANT 5468	Polycarboxylic acid ammonium salt 40%	Excellent dispersing performance of ferrite and fine ceramics. Less residue after sintering.	Net 20kg can
	SN-DISPERSANT 6100	Polycarboxylic acid amine salt, polyoxyalkylene glycol monomethyl ether, etc. 70%	Versatile for dispersing inorganic pigment, organic pigment. Excellent color development, color acceptance, water-repellency of paint.	Net 18kg can
	SN-DISPERSANT 6150	Polycarboxylic acid amine salt, polyoxyalkylene glycol monomethyl ether, etc. 73%	Versatile for organic pigment(magenta, yellow). Excellent color development, color acceptance of paint.	Net 18kg can
SN-PW-43	Formaldehyde-naphthalenesulfonic condensate sodium salt 41%	Versatile for dispersing ceramics, pigment, emulsion particles. Also versatile for emulsifier for emulsion polymerization.	Net 20kg can	
nonaqueous	NOPCOSPERSE 092	Cationic surfactant 100%	Excellent dispersibility of fine powder of carbon into diesel oil and pigments into organic solvent.	Net 18kg can
	SN-DISPERSANT 9228	Ester type nonionic surfactant 100%	Versatile for ferrite, fine ceramics in organic solvent. Useful as both wetting agent and dispersant.	Net 18kg can
	SN-SPERSE 70	Nonionic surfactant 100%	Dispersant for grinding process of pigments. Versatile for magnetic ink, magnetism tape.	Net 17kg can Net 200kg drum
	SN-SPERSE 2190	Polycarboxylic acid amine salt 51%	Versatile for various pigment using together bentonite. Prevent flooding.	Net 15kg can

Defoamer for exterior siding board making process

Product Name	Description & Application	Packaging
SN-DEFOAMER 170	Polyether type foam breaking/anti-foaming agent. Versatile for architectural siding board making process.	Net 17kg can Net 180kg drum
SN-DEFOAMER 265	Polyether type foam breaking/anti-foaming agent. Versatile for treatment of drainage water of architectural siding board making process.	Net 18kg can Net 200kg drum
SN-DEFOAMER 464	Polyether type foam breaking/anti-foaming agent. Versatile for architectural siding board making process.	Net 18kg can
SN-DEFOAMER 577	Emulsion type deaerator/anti-foaming agent. Versatile for architectural board making process. Show no adverse effect to water resistance and prevent foaming of drainage water and flocculation by foaming.	Net 17kg can Net 200kg drum Net 1000kg container

Defoamer for cement, Anti-skinning agent, Surface appearance improver

Product Name	Description & Application	Packaging
SN-CLEANACT 900	Delaying the drying of the surface of cement type coating during setting. Versatile for preventing skinning and wrinkling.	Net 16kg cardboard box
SN-DEFOAMER 55-P	Pre-mix type powder type deaeration, anti-foaming agent for powder type product (cement, gypsum, polyvinyl alcohol, starch etc.)	Net 7kg can Net 20kg cardboard box
SN-DEFOAMER 60-FP		Net 9kg can Net 25kg cardboard box Net 85kg drum
SN-DEFOAMER 77-P		Net 7kg can Net 20kg cardboard box

Defoamer for metal process

Product Name	Description & Application	Packaging
NOPTAM 777-F	Shows excellent dispersibility and less cratering. General anti-foaming agent.	Net 17kg can Net 180kg drum
SN-DEFOAMER 1330	Metal soap type anti-foaming agent. Good for foam breaking.	Net 16kg can Net 180kg drum
SN-DEFOAMER 470	Polyether type anti-foaming agent with less scum and cratering.	Net 18kg can Net 190kg drum
SN-DEFOAMER 477T	Amide wax type anti-foaming agent. Good for anti-foaming.	Net 15kg can Net 170kg drum
SN-DEFOAMER 5100	Anti-foaming agent with long lasting ability and good water dispersibility.	Net 15kg can Net 170kg drum

Defoamer for Kraft pulp washing process

Refer the classification of Defoamer at p.19

Product Name	Appearance	Description & Application	Packaging
SN-DEFOAMER 230K	Light Yellowish Liquid	Oil based anti-foaming agent/deaerator. Effective for both soft wood and hard wood black liquor.	Net 16kg can Net 180kg drum

Cooking accelerator of Kraft pulp process, Oxygen bleaching accelerator

Product Name	Appearance	Description & Application	Packaging
LIGNOSOLVER DI-750	Light Yellowish Liquid	Cooking accelerator for craft pulp process. Improve the yield of pulp with the use of anthraquinone together. And effective for preventing tip hanging.	Net 200kg drum

Defoamer for screen room and bleaching process

Product Name	Appearance	Description & Application	Packaging
SN-DEFOAMER 171	Light Yellow Liquid	Polyether type defoaming agent with excellent quick performance. Versatile for paper making process of base paper of coating, liner board.	Net 17kg can Net 180kg drum
SN-DEFOAMER 265	Yellow transparent Liquid	Foam breaking/anti-foaming agent for paper making, clear coating process.	Net 18kg can Net 200kg drum
SN-DEFOAMER 577	White Liquid	High-alcohol emulsion type defoamer which does not influence to size fastness. Effective for wide variety of conditions, especially for high temperature paper-making process.	Net 17kg can Net 200kg drum Net 1000kg container

Defoamer for paper making process

Product Name	Appearance	Description & Application	Packaging
SN-DEFOAMER 171	Light Yellow Liquid	Polyether type foam breaking, anti-foaming agent with quick effect. Versatile for paper making process of base paper for coating, liner board.	Net 17kg can Net 180kg drum
SN-DEFOAMER 265	Yellow transparent Liquid	Foam breaking, anti-foaming agent for paper making, clear coating process.	Net 18kg can Net 200kg drum
SN-DEFOAMER 577	White Liquid	High-alcohol emulsion type defoamer which does not influence to size fastness. Effective for wide variety of conditions, especially for high temperature paper-making process.	Net 17kg can Net 200kg drum Net 1000kg container

■ This is a chemical product developed and produced for industrial use. It is strictly requested not to use this product to the application to be taken into human body.

■ The classification of Defoamer

The function of defoamer is classified into three kinds. Function and agent types are defined as follows.

「Classification of function」

- (1) Foam Breaking : Unite or break foams by penetrating the foam from the air side.
- (2) Anti-foaming : Make foams hardly made by penetrating the foam from the liquid side and unites or breaks them.
- (3) deaerator : Make foams easily rise by penetrating the interfacial surface of the foam and unites them.

「Classification of agent type」

Defoamer	: General terms of Foam breaking agent, Anti-foaming agent and Deaerator.
Foam breaking agent	: The agent which penetrates the foam from the air side and unites or breaks foams.
Anti-foaming agent	: The agent which penetrates the foam from the liquid side and unites or breaks foams. Eventually foams will hardly be made.
Deaerator	: The agent which penetrates the surface of the foam and unites foams. The foams easily rise.
Foam breaking agent · Anti-foaming agent	: The agent which mainly has foam breaking function for Anti-foaming function.
Anti-foaming agent · Foam breaking agent	: The agent which mainly has Anti-foaming breaking function for Deaerator function.
Deaerator · Anti-foaming agent	: The agent which mainly has Deaerator function for Anti-foaming function.
Anti-foaming agent · Deaerator	: The agent which has Anti-foaming function for Deaerator function.

Index

D

DAPPO SN-348	13
DAPPO SN-351	13
DAPPO SN-354	13
DAPPO SN-357-LS	13
DAPPO SN-374	13

L

LIGNOSOLVER DI-750	18
LOMAR D	8,16
LOMAR PWA-40K	8,15,16
LOMAR PWH	8,16

N

NOPALL 717T	10
NOPCALL 5200K	8
NOPCALL D-4220	8,16
NOPCALL E-9001	14
NOPCALL W-2990	9
NOPCOCERA LU-6418	12,15
NOPCOHEX 2020	12
NOPCOMUL MS-40	12,15
NOPCOSPERSE 092	13,16
NOPCOSPERSE 5600	8,15,16
NOPCOTE PEM-17	15
NOPTAM 740A	14
NOPTAM 777-F	4,14,17
NOPTAM 7001	7
NOPTAM 8034-F	4,14
NOPTAM 8034-LF	4

O

OPTIACT I-10	12
--------------	----

S

SN-CLEANACT 900	17
SN-COTE 287	12
SN-DEFOAMER 55-P	17
SN-DEFOAMER 60-FP	17
SN-DEFOAMER 77-P	17
SN-DEFOAMER 154	4
SN-DEFOAMER 154S	4
SN-DEFOAMER 170	6,17
SN-DEFOAMER 171	18

SN-DEFOAMER 180	6
SN-DEFOAMER 184	6
SN-DEFOAMER 230K	18
SN-DEFOAMER 247	6
SN-DEFOAMER 265	6,17,18
SN-DEFOAMER 318	4
SN-DEFOAMER 319	4
SN-DEFOAMER 321C	4
SN-DEFOAMER 325	6
SN-DEFOAMER 327	6
SN-DEFOAMER 375	6
SN-DEFOAMER 381	7,14
SN-DEFOAMER 388N	7
SN-DEFOAMER 391	5
SN-DEFOAMER 398	5
SN-DEFOAMER 399	5
SN-DEFOAMER 444	6,14
SN-DEFOAMER 464	17
SN-DEFOAMER 466	6
SN-DEFOAMER 470	6,14,15,17
SN-DEFOAMER 477-NS	5,14
SN-DEFOAMER 477T	5,14,17
SN-DEFOAMER 479	5,14
SN-DEFOAMER 485	6,14
SN-DEFOAMER 522	7,14
SN-DEFOAMER 577	17,18
SN-DEFOAMER 1310	5
SN-DEFOAMER 1311	5
SN-DEFOAMER 1315	5
SN-DEFOAMER 1316	5
SN-DEFOAMER 1329	4
SN-DEFOAMER 1330	4,14,17
SN-DEFOAMER 1340	5
SN-DEFOAMER 1341	4
SN-DEFOAMER 1355	6
SN-DEFOAMER 1356	6
SN-DEFOAMER 1360	5
SN-DEFOAMER 1390	4,14
SN-DEFOAMER 2000	7
SN-DEFOAMER 5016	6

SN-DEFOAMER 5100	5,17
SN-DEFOAMER PC	6,14,15
SN-DISPERSANT 5020	8,15,16
SN-DISPERSANT 5027	8,15,16
SN-DISPERSANT 5029	8,15,16
SN-DISPERSANT 5034	8,16
SN-DISPERSANT 5040	16
SN-DISPERSANT 5468	8,15,16
SN-DISPERSANT 6100	8,15,16
SN-DISPERSANT 6150	8,16
SN-DISPERSANT 9228	13,15,16
SN-DULLACT 1200W	12
SN-PW-43	8,16
SN-SPERSE 70	13,16
SN-SPERSE 2190	13,15,16
SN-THICKENER 613	10
SN-THICKENER 617	10
SN-THICKENER 618	10
SN-THICKENER 621N	10
SN-THICKENER 621TF	10
SN-THICKENER 623N	10
SN-THICKENER 625N	10
SN-THICKENER 630	10
SN-THICKENER 640	10
SN-THICKENER 641	10
SN-THICKENER 660T	10
SN-THICKENER 665T	10
SN-THICKENER 920	11
SN-THICKENER 929-S	11
SN-WET 126	9
SN-WET 970	9,14
SN-WET 980	9
SN-WET 984	9
SN-WET 990	9
SN-WET 991	9,14
SN-WET 996	9
SN-WET 999	9
SN-WET L	9
SN-WET OT-70	9
SN-5598	4

V

VISTOOL 3015	11
--------------	----